

07/10/00
JCS64 U.S. PRO

07-11-00

4

Please type a plus sign (+) inside this box → ☐

Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. **SZ-9-99-017 (728-167)**

First Inventor or Application Identifier **Dirk HUSEMANN et al.**

Title **Method and Apparatus for Providing A More...**

Express Mail Label No. **EL393562287US**

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages **50**]
(preferred arrangement set forth below)
 - Descriptive title of the invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the invention
 - Brief Summary of the invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets **10**]
4. Oath or Declaration [Total Pages **6**]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

*** NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ * Small Entity Statement(s) ☐ Statement filed in prior application, Status still proper and desired
(PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☐ Other:

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name	Paul J. Farrell, Esq.				
Address	Dilworth & Barrese 333 Earle Ovington Blvd.				
City	Uniondale	State	NY	Zip Code	11553
Country	U.S.	Telephone	(516) 228-8484	Fax	(516) 228-8516

Name (Print/Type)	Paul J. Farrell	Registration No. (Attorney/Agent)	33,494
Signature	<i>Paul J. Farrell</i>	Date	7/10/00

CERTIFICATION UNDER 37 C.F.R. § 1.10 I hereby certify that this correspondence and the documents referred to as enclosed are being deposited with the United States Postal Service on date below in an envelope as "Express Mail Post Office to Addressee" Mail Label Number EL393562401US addressed to: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

Dated: July 10, 2000

Tidge Holmberg

U.S. PRO
09/613113
07/10/00

Assistant Commissioner for Patents
Washington, D.C. 20231
Sir:

ATTORNEY DOCKET NO. SZ-9-99-017 (728-167)
Date: July 10, 2000
Express Mail Label: EL393562287401US
Date of Deposit: July 10, 2000

Transmitted herewith for filing is the Patent Application of:

Inventors: Dirk HUSEMANN and Michael MOSER

For: METHOD AND APPARATUS FOR PROVIDING A MORE POWERFUL USER-INTERFACE TO A DEVICE WITH A LIMITED USER-INTERFACE

Enclosed are: ☒ 41 sheets of specification; ☒ 1 sheet(s) of Abstract;
☒ 8 sheet(s) of claims; ☒ 10 sheet(s) of informal drawing(s);

☒ An assignment of the invention to International Business Machines Corporation with Recordation Form.

☒ Declaration and Power of Attorney.

☐ A certified copy of a _____ application, from which priority under Title 35 USC §119 is claimed.

☐ Associate Power of Attorney.

The filing fee has been calculated as shown below:

(Col. 1)		(Col. 2)	OTHER THAN A SMALL ENTITY	
FOR:	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE				\$690.00
TOTAL CLAIMS	26 -20 =	6	X \$18 =	\$108.00
INDEP CLAIMS	4 -3 =	1	X \$78 =	\$ 78.00
MULTIPLE DEPENDENT CLAIMS PRESENTED			+ 260 =	\$ -0-
If the difference in Col. 1 is less than zero, enter "0" in Col. 2.			TOTAL	\$876.00

☐ A check in the amount of \$_____ to cover the ☐ filing fee(s), and a check in the amount of \$_____ to cover the ☐ recording fee are enclosed.

☒ Please charge my Deposit Account No. 50-0510 in the amount of \$226.00.

☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 50-0510/IBM (Yorktown Heights). A duplicate copy of this sheet is enclosed.

☒ Any additional filing fees required under 37 CFR 1.16.

☒ Any patent application processing fees under 35 CFR 1.17.

Respectfully submitted,

By: Paul S. Farrell
Paul S. Farrell
Registration No. 33,494

Please address all
correspondence to:
DILWORTH & BARRESE
333 Earle Ovington Boulevard
Uniondale, NY 11553
Tel: (516) 228-8484
Fax: (516) 228-8516

Attorney for:
IBM Corporation
Intellectual Property Law Dept.
P.O. Box 218
Yorktown Heights, NY 10598

CERTIFICATION UNDER 37 C.F.R. § 1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date July 10, 2000 in an envelope as "Express Mail Post Office to Addressee" Mail Label Number EL393562287401US addressed to: Assistant Commissioner for Patents, Box PATENT APPLICATION, Washington, D.C. 20231.

METHOD AND APPARATUS FOR PROVIDING A MORE POWERFUL
USER-INTERFACE TO A DEVICE WITH A LIMITED USER-INTERFACE

TECHNICAL FIELD

5 The present invention relates to computer systems which have a limited user-interface, such as hand-held pervasive computing devices, and in particular to a design for allowing easy interaction with such computer systems.

10 **BACKGROUND OF THE INVENTION**

15 Through relatively recent technological innovations, computer systems have become dramatically smaller and more portable. Even very powerful personal computers (PCs), for example, are small enough to sit on the desk at work. Smaller still are lap top computers and notebook computers. There are computer terminals which are small enough to be mounted in a vehicle, such as a delivery truck. Still smaller are hand held terminals, which are typically used for their portability features, allowing a user to carry the terminal in one hand and operate it with the other.

20 In addition, there is a trend toward offering consumers electronic devices that include some sort of computer system, e.g., a microprocessor. Usually, these computer systems not only control the operation or function of the consumer device, but also provide some interface for a user or operator to control certain functions or parameters according to actual needs. It is in the nature of these

25

consumer devices that they do not have a full user-interface like a computer with display and keyboard. It is not likely that a dishwasher, for example, will ever have such a full user-interface. In some cases the interface is limited due to space constraints (a typical example for this is a wrist watch), while in other cases the interface is limited to keep the cost of manufacturing low, while still in other cases the processing power of the computer system, or the constrained memory space, limits the interaction between the user and system.

Many of today's devices have an inadequate user-interface. A typical example is a compact disk (CD) player which allows programming of CD titles using a small four button-control. Programming of such a CD player is very cumbersome because one needs to use the buttons to move through the entire alphabet to select letters and/or numbers. Another example is a wrist watch that allows the user to enter phone book entries, appointments, and to-do items. Typically, the keyboard includes a very limited number of keys. Furthermore, the display is small and its resolution limited. Certain keys have to be pressed several times to reach special characters, or to activate special functions. Yet another example is a personal digital assistant (PDA) with a touch sensitive screen. In this case the screen occupies most of the device's surface and there are very few buttons, if any. Some functions are easily accessible using a pointing device, but other functions have to be selected or activated flipping through several layers of menus, for example. Other examples are telephones, vending machines, microwave ovens, mobile phones, etc. For the purposes of the present description these devices are referred to hereinafter as user-interface limited devices.

Currently there are a few approaches using a personal computer (PC) to run better user-interfaces, e.g. the "Nokia Cellular Data Suite" for mobile phones allows the entry of phone book data. The Cellular Data Suite is a hardware and software package from Nokia designed for cellular phones. Another example is a wrist-watch that has an IR-communication feature (such as the Casio PC Unite Data Bank Watch, HBX-100B-1) used to connect to a PC.

There are many other examples of user-interfaces that are severely lacking for various reasons, the most prominent of which are size and cost constraints. Often such user-interface restrictions make the respective devices less useful for their owners than they could be.

It would thus be useful to have a way to unleash the full potential of all these devices and to program and configure them much more conveniently, thereby making them more useful to their users.

There is growing demand in the industry to offer devices that are 'open' in the sense that a user has access via an interface to the device's processor or other components. An ideal 'open' device would be fully controlled by the user, preferably within well-defined rules to prevent misuse or destruction of the device itself.

In addition, there are a growing number of devices that are network enabled, which means that they can communicate with one or more other devices via a network. This can be achieved using physical connections, such as cables or fibers, for example. As these devices get smaller, however, it becomes desirable to replace the physical connections with wireless connections (e.g. body networks, radio

frequency connections, or infrared connections), since physically connecting the devices by means of cables or fibers severely reduces the efficiency gained by making the units smaller. Ad-hoc wireless connections are required where devices move around, enter an area and exit the area. The term ad-hoc refers to the need for frequent network reorganization.

In addition, there are many different known communications protocols or standards that have been developed and designed (and continue to be developed and designed) directed at communication between devices or subsystems. Hereinbelow, some wireless communications protocols or standards will be mentioned. There are many fiber or cable-based, standardized approaches that are suited for such communication as well.

GTE Corporation has developed a short-range radio-frequency (RF) technique which is aimed at giving mobile devices such as cellular phones, pagers and hand-held personal computers (PCs) a smart way to interact with one another. GTE's technique is tentatively named Body LAN (local area network). The original development of Body LAN was via a wired vest with which various devices were connected (hence the name Body LAN). This then developed into to an RF connection.

Xerox Corporation has developed a hand-held computing device called PARC TAB. The PARC TAB is portable yet connected to the office workstation through base stations which have known locations. The PARC TAB base stations are placed around the building, and wired into a fixed wired network. The PARC TAB system uses a preset knowledge of the building layout and the identifiers of the various base

stations to determine the strongest base station signal for a PARC TAB portable device. A PARC TAB portable device has a wireless interface to the base stations. The PARC TAB system assumes that the PARC TAB portable device is always
5 connected to the network infrastructure. The location of each portable PARC TAB device is always known to the system software. The base stations establish regions and are connected to power supplies. PARC TAB communication systems have a star topology.

10 In an attempt to standardize data communication between disparate PC devices, several companies, including Ericsson, IBM, Intel, Nokia, and Toshiba have established a consortium to create a global standard for wireless RF-based connectivity between fixed, portable and mobile devices.
15 There are many other companies adopting the proposed standard. The proposed standard is called Bluetooth and comprises architecture and protocol specifications ranging from the physical layer up to the application layer. The Bluetooth standard contemplates allowing users to connect a
20 wide range of devices easily and quickly, without the need for cables, expanding communications capabilities for mobile computers, mobile phones and other mobile devices. The Bluetooth operating environment is not yet fully defined, but similarities are expected with the IrDA (Infrared Data
25 Association) specification and the Advanced Infrared (AIr) specification. It is not unreasonable to expect that the Bluetooth standard will eventually incorporate aspects of the IEEE standard 802.11 and/or HIPERLAN, as promulgated by the European Telecommunications Standards Institute (ETSI).

30 Bluetooth radio technology provides a standard protocol suitable for forming small private ad-hoc groupings of

connected devices away from fixed network infrastructures. Bluetooth makes a distinction between a master unit - which is a device whose clock and hopping sequence are used to synchronize all other devices - and slave units in the same network segment. In other words, the Bluetooth approach is centralized. A query-based discovery design is used for finding Bluetooth devices with an unknown address. Queries are also centralized at a registry server. Further details can be found in Haartsen, Allen, Inouye, Joeressen, and Naghshineh, "Bluetooth: Vision, Goals, and Architecture" in the Mobile Computing and Communications Review, Vol. 1, No. 2. Mobile Computing and Communications Review is a publication of the ACM SIGMOBILE.

HomeRF (based on Shared Wireless Access Protocol (SWAP)) is another example of a prospective operating environment protocol which can be used to connect devices. A HomeRF Working Group was formed to provide the foundation for a broad range of interoperable consumer devices by establishing an open industry specification for wireless digital communication between PCs and consumer electronic devices anywhere in and around the home. The working group, which includes the leading companies from the personal computer, consumer electronics, peripherals, communications, software, and semiconductor industries, is currently developing a specification for wireless communications in the home called the SWAP. The HomeRF SWAP system is designed to carry both voice and data traffic and to interoperate with the Public Switched Telephone Network (PSTN) and the Internet. It operates in the 2400 MHz band and uses a digital frequency hopping spread spectrum radio. The SWAP technology protocol being developed is being derived to some extent from extensions of existing cordless telephone (DECT)

and wireless LAN technology to enable a new class of home cordless services. It envisions supporting both a time division multiple access (TDMA) service to provide delivery of interactive voice and other time-critical services, and a carrier sense multiple access/collision avoidance (CSMA/CA) service for delivery of high speed packet data. The SWAP system is contemplated to operate either as an ad-hoc network or as a managed network under the control of a connection point. In an ad-hoc network, where only data communication is supported, all stations will be equal and control of the network will be distributed between stations. For time critical communications such as interactive voice, the connection point - which provides the gateway to the PSTN - will be required to coordinate the system. Stations will use the CSMA/CA to communicate with a connection point and other stations. Further details about HomeRF can be found at the Home Radio Frequency Working Group's web site <http://www.homerf.org>. The SWAP specification 1.0 is incorporated by reference in its entirety.

There are several other known protocols and techniques that allow communication between two or more devices. The above described Bluetooth radio technology and HomeRF approach are prominent wireless examples.

SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a method and apparatus for providing a more powerful user-interface to a device with a limited user-interface.

It is another object of the present invention to provide a method and apparatus for simplified and improved user interaction with a device with a limited user-interface, also referred to herein as an "interface limited device."

5 To achieve the above objects, a method and apparatus in accordance with the present invention includes a standard wireless communications protocol which allows a user to interact with or control an interface limited device wirelessly using a second (independent) device.

10 In other words, the present invention provides a more powerful user-interface to an interface limited device by interfacing it with a more powerful device in its vicinity. The more extensive input capabilities of the more powerful device (second device) are employed to control certain
15 aspects of the limited user-interface device (first device).

The method in accordance with the present invention includes the steps of transmitting user-interface information from the first device to the second device; providing a user-interface at the second device
20 corresponding to the user-interface information; receiving user input via the user-interface at the second device; transmitting user command information corresponding to the user input from the second device to the first; and
25 executing the corresponding user commands at the first device.

DESCRIPTION OF THE DRAWINGS

The above and other objects, features and advantages of the present invention will become more apparent in light of the following detailed description of an exemplary embodiment thereof taken in conjunction with the attached drawings in which:

FIG. 1 is a block diagram illustrating a typical environment wherein the present invention is utilized, in accordance with an embodiment of the present invention;

FIG. 2 is an illustrative representation of an exemplary execution tree in accordance with an embodiment of the present invention;

FIG. 3 illustrates a first user-interface window in accordance with an embodiment of the present invention;

FIG. 4 illustrates a second user-interface window in accordance with an embodiment of the present invention;

FIG. 5 illustrates a third user-interface window in accordance with an embodiment of the present invention;

FIG. 6 is a block diagram illustrating another embodiment of a typical environment in which the present invention is utilized, in accordance with an embodiment of the present invention;

FIG. 7A is a block diagram illustrating a first device (with a limited user-interface) in accordance with an embodiment of the present invention;

FIG. 7B is a block diagram illustrating a second device with a more powerful user-interface) in accordance with an embodiment of the present invention;

FIG. 7C is a block diagram illustrating the hardware layer of a second device in accordance with an embodiment of the present invention;

FIG. 7D is a block diagram illustrating the hardware layer of a first device in accordance with an embodiment of the present invention;

FIG. 8 is a flowchart illustrating the method of the present invention in a first device, in accordance with an embodiment of the present invention;

FIG. 9 is flowchart illustrating the method of the present invention in a second device to control a first device in accordance with an embodiment of the present invention; and

FIG. 10 is a Wireless Markup Language (WML) document describing the user-interfaces of Figures 3-5.

DESCRIPTION OF PREFERRED EMBODIMENTS:

For the purpose of the present description, a network can be anything that allows a first device (the limited user-interface device) to communicate with a second device (which has a more powerful user-interface). A simple point-to-point link, a local area network (LAN), a GSM telephone link, an ethernet link or any other kind of link is hereinafter referred to as network. This network can either be a

physical network or a wireless network (e.g., infrared (IR), radio-frequency (RF), such as HomeRF). The network may be completely isolated from any other network, or it might comprise one or more access points which provide the devices with access to another network.

The specific range that constitutes a wireless network in accordance with the present invention depends on actual implementation details. Generally, a wireless network can be described as having a coverage area between a few square meters and several thousands of square kilometers (e.g., in case of a GSM network). Under certain circumstances the communication range may go even further. The two devices which communicate with each other have to be "in vicinity," which means that they have to be sufficiently close or otherwise interconnected in order to be able to exchange information with each other.

The devices need to be able to transmit and/or receive information via the network. Accordingly, two devices that communicate with each other must support the same communication protocol.

Well suited to support communication between devices is the Bluetooth communications design, which is described in the Haartsen, Allen, Inouye, Joeressen, and Naghshineh, "Bluetooth: Vision, Goals, and Architecture" in the Mobile Computing and Communications Review, Vol. 1, No. 2. Mobile Computing and Communications Review is a publication of the ACM SIGMOBILE. This reference is incorporated herein by reference in its entirety.

It is assumed, that once the devices are in vicinity of each other, a wireless communication path between these devices can be established - e.g. using magnetic field (near field / 5 - 30 cm), infrared (IR), e.g., IrDA (0.5 - 2m) or
5 AIr (1 -10m), or low-power radio-frequency (RF) communication, e.g. BlueTooth (~1 - 10m), or HomeRF (~1 - 50m), just to list some examples of wireless schemes that are suited.

Of course such a vicinity requirement may also be
10 accomplished via some global addressing design and a local proxy (e.g. an IR-beacon on each ceiling or a BlueTooth "relay" in each room or home) connected to a network (e.g. the Internet), thus effectively allowing remote control of a variety of devices from virtually anywhere in the world.
15 Such a global addressing design is also required in a GSM-based implementation of the present invention.

It is understood by those skilled in the art that at the present time many of the protocols that are suited for use in wireless communications systems are still in draft
20 status. The present design is independent of any one particular protocol and can be used in connection with many such protocols. Accordingly, someone having ordinary skill in the art is able to implement the present design in existing protocol environments as well as in protocol
25 environments under development or yet to be developed.

The present design can be used anywhere inside, i.e. warehouses, on manufacturing floors, in offices, on trading floors, in private homes, and outside of buildings, in cars and trucks, in airplanes, just to mention a few examples.

Two devices can be connected using a 1:1 connection. Possible media are infrared and magnetic fields. The procedure to setup such a 1:1 connection can be similar to today's setup of a connection between two IrDA enabled devices, i.e. the devices must be positioned such that their communication subsystems (transceivers) can "see" each other. Then both systems are triggered to start a connection setup procedure until a wireless communication channel is established.

Likewise, two devices can be connected using a shared medium. A possible shared medium is RF (Radio Frequency). Possible systems could be based on technology and protocols like BlueTooth, DECT, and HummingBird.

Details about HummingBird transceivers are given in "Hummingbird Spread Spectrum Transceiver Operator's Manual", Rev. 24 June, 1998, XETRON Corp., Cincinnati, Ohio, USA

Details concerning the basic problems regarding identification and addressing, initial (resource) discovery, matching and selection of communication partners, etc. depend on the medium used and the communications protocol employed.

When referring to a device, any kind of device is meant that can establish a network connection to another device. Examples of devices are: laptop computers, workpads, nodepads, personal digital assistants (PDAs), notebook computers and other wearable computers, desktop computers, computer terminals, networked computers, internet terminals and other computing systems, set-top boxes, cash registers, bar code scanners, point of sales terminals, kiosk systems, cellular phones, pagers, wrist watches, digital watches,

badges, and smart cards. Other contemplated devices include: headsets, Human Interface Device (HID) compliant peripherals, data and voice access points, cameras, printers, fax machines, keyboards, joysticks, HiFi systems, audio (sound) cards, loudspeakers, amplifiers, video cards, kitchen appliances, tools, sensors such as smoke and/or fire detectors, and virtually any other digital device.

Other examples of devices that can be used in connection with the present invention are, personal effects being equipped with computer-like hardware, such as a "smart wallet" computer, jewelry, or articles of clothing. In addition to a "smart wallet" computer, there are a number of other variations of wearable computers. A "belt" computer is such a variation which allows the user to surf, dictate, and edit documents while they are moving around. Yet another example is a child's computer which is comparable to a personal digital assistant for grade-school children. The child's computer might hold assignments, perform calculations, and help kids manage their homework. It can interface with other children's computers to facilitate collaboration, and it can access a teacher's computer to download assignments or feedback. Any wearable or portable device, any office tool or equipment, home tool or equipment, system for use in vehicles, or systems for use in the public (i.e. vending machines, ticketing machines, automated teller machines, etc.) may include the present invention.

It is also assumed that a device, as used in connection with the present invention, includes a minimum amount of processing power to enable it to participate in the design according to the present invention. These devices are thus

also referred to as computer devices. Most, if not all, of the above listed devices may be viewed as being devices with limited user-interfaces. This may even be the case for a personal computer which has a display and a keyboard. There is still room for improvement in such a computer's interface, e.g., by adding speech input. There are no absolute criteria which can be used to decide whether a particular device is a device with a limited user-interface or not. There is always room for improvement and thus any computer device per se is assumed to be a device with a limited user-interface. The present invention may be implemented where there is a second computer device that has a more powerful user-interface, more adequate, more convenient, or superior user-interface capabilities. Not all aspects of the user-interface have to be superior or more powerful. It is sufficient, for example, if there is a first device which has no speech input (i.e. it has a limited user-interface) and a second device which has a speech input. The present invention may also be implemented, as selected by a user, to control the second computer device that has a more powerful user-interface via the device with the limited user-interface, if so desired as a users convenience dictates.

Some of the above-mentioned devices can be regarded hereinafter as the device (controller) whose interface is used to interact with the user-interface limited device (controlled device).

A computer device is generally referred to as a computer device with a limited user-interface where, for example, one or more of the following applies: the user-interface is inadequate for the tasks required; the user-interface is

small and difficult to read, understand, or hear; the user-interface presents an inconvenience to the user; there is no graphics capable display (e.g. a text-only display); there is a restricted number of input keys, or input keys which
5 are too small; there are too many functions which are mapped to a limited number of buttons and thus imposes complicated control structures that make it difficult to operate the device without prior extensive study of a user's manual, especially for seldom used or advanced functions; the user-
10 interface is not powerful enough, making its use too slow, or has low resolution, or the like.

Devices with a more powerful user-interface capabilities generally fulfill, for example, one or more of the following criteria: there is a larger screen; there is a
15 screen with graphics capability; there is a full keyboard; there is a pointing device; there is a voice-input feature and so forth.

The user-interface may be any kind of interface used for interaction between a user and the device, such as a
20 display, keyboard, mouse, track point, audio output, speech recognition input, tactile input, etc.

A typical environment where the present invention is used is illustrated in Figure 1. There is a first computer device
10 which has a limited user-interface 11 (in the present example the user-interface comprises a simple display and a few buttons). When there is a second computer device 12 in
25 vicinity of the first device 10 that has superior user-interface capabilities (keyboard 13 and display 14) than that of the first device 10 and which may be controlled or
30 configured, and assuming that the two devices 10 and 12 communicate with each other, the superior user-interface

capabilities of the second device 12 may be employed to facilitate and speed-up the use of the first device 10 by transmitting a more powerful user-interface (user-interface description 15) stored in the first device 10 to the second device 12. The first device 10 and second device 12 communicate via a wireless communications channel 16. A more powerful user-interface is a user-interface that is easier to use, i.e. "richer" (in that it has more features), more intuitive, faster, or the like. The user-interface description 15 is then processed by the second device 12 such that the more powerful user-interface 19 is then displayed and operated via the second device 12. Then user-inputs and/or commands and/or parameters are sent back to the first device for execution. In the present example, commands 17 (<command>) and parameters 18 (<parameters>) are sent back to control or operate the first device 10 in response to commands input by a user on the second device 12.

The first device 10 may provide its user-interface in some standard format (herein referred to as a user-interface description 15) to be broadcast to all other devices, such as the second device 12, appearing in vicinity. If the user-interface description 15 is sufficiently small then the entire interface description can be transmitted quickly and stored at these other devices.

If there are a plurality of devices ("controllable" devices) with limited user-interfaces in vicinity of a second device with a superior user-interface, then the user requests some visual verification on the second device listing all "controllable" devices (e.g., in the form of a list, a menu, a graph, or the like) from which he/she can

then choose one device with a limited user-interface and request its user-interface to be displayed, thereby beginning the aforementioned process, according to the present invention.

5 The communication path 16 between the first device 10 and second device 12 is used to transfer data for a specific command from the first device 10 (thus becoming the "controlled device" or server) to the second device 12 in vicinity (the controller or client/user agent). The second
10 device 12 provides the user-interface description 15 to the user. This can be done by displaying it (reference number 19) to the user on display 14, for example. Then, the second device 12 awaits the user's interaction.

15 The user enters responsive commands, e.g. by picking his/her choice from a presented menu, or supplies input by keying-in the requested data. In doing so the user makes use of the controller-device's more powerful user-interface capabilities (be it a larger keyboard 13, voice-recognition, color-display 14, or the like). Information describing the
20 user's interaction, selection, or input is then sent back to the controlled device 10 in the form of "requests" (i.e. commands 17 and - optionally - one or more parameters 18) via the communication path 16.

The controlling device 12 is not required to have any prior knowledge of the features and the user-interface of the controlled device 10. No special software needs to be pre-installed because everything is dynamically downloaded from the controlled device 10 when required. Any Laptop or PDA that happens to be handy, or maybe even a public kiosk system, could quickly be used as a "user-interface server" without installing anything and without leaving any noticeable traces on that system (except maybe a few modified cache-entries in the system's memory). However, there are of course some prerequisites which must be fulfilled by all involved devices to allow the aforementioned interfacing.

One such prerequisite requires that both devices have a standardized procedure and format of describing sufficiently rich user-interfaces such that it is possible to render typical user-interface controls, i.e. display input-prompts, selection-menus, help-texts or other text-messages to visualize a device's status, etc. Suitable candidates for such user-interface description formats are: HTML (the HyperText Markup Language used in the WWW), WML (Wireless Markup Language defined by the WAP forum), other, still-to-be-defined XML (Extensible Markup Language) dialects, and X-windows protocol.

One preferably uses a user-interface description which is optimized so that transmissions between devices are efficient. The user-interface description is preferably flexible and extensible.

In addition, the devices must be able to detect each other's presence, exchange basic capability descriptions and - on demand - be able to setup a sufficiently reliable

point-to-point connection amongst each other. This basic capability description can be a simple flag or bit combination, for example, which describes standard types of services. These standard types of services may be predefined such that they can be identified by a simple flag or bit combination. The basic capability description can also be any other kind of information which is well suited to identify one or several of the services offered. In addition to identifying a type of service, one might have to set or define certain parameters and options (referred to hereinafter as parameters).

Thus, there are certain common requirements between devices. The devices, for example, will initiate a resource discovery design and exchange a capability and/or device-class description for describing their respective service offerings once they detect their mutual presence. A device includes the ability to detect the presence of other potential devices in vicinity by receiving communications from the other potential devices, and upon detection of other devices in vicinity, upload information describing their service offerings. In addition, it is advantageous if a device is able to signal its presence to other devices and to download its own service offering information or (broadcast it) to the other devices. The broadcast of service information may optionally be done using a different protocol layer than the layer eventually used for sending user initiated command information to remotely control the controlled device 10. In another approach, the service information is inherently known based on which service is offered and by what device (i.e., all devices XYZ offer the services A and B, and all devices MNO offer the services C and D, for example).

An example of a design for broadcast and/or discovery of service offering information is addressed in a co-pending European patent application entitled "Service Advertisements in Wireless Local Networks", filed on 25 January 1999, currently assigned to the assignee of the present application, the contents of which are hereby incorporated by reference. According to this design, each device takes turns broadcasting a list of services (among which could be the ability to send user-interface description and receive the corresponding commands) available. The general approach is that a group of devices will take turns broadcasting a list of service offerings (hereinafter referred to as user-interface description) available. By using variable transmission delays that are reset when other simultaneous device broadcasts are received, and adjusting the distribution of these delays, new devices in vicinity are quickly identified, and devices leaving vicinity are quickly identified as no longer in vicinity. This design provides for the formation of small separate ad-hoc groupings of connected devices. Local networks are established immediately (ad-hoc) when needed, and change as the grouping varies according to the devices currently in vicinity. A network of all eligible devices in vicinity (devices that will allow themselves to be networked) can be established while allowing devices to be added or removed accordingly.

The present invention implements any suitable design used for broadcasting and/or discovery of service offerings of the devices as described above, without being limited to any one particular design. What is required is that a device having a more powerful user-interface receive and store service offering information describing those devices in vicinity having a limited user-interface. The service

information is updated frequently, since the wireless networks composition may change frequently.

In one example, a resource discovery design may allow two devices within vicinity to determine whether certain services are available and what kind of services are available. A first device maintains a record with information about services and associated identifiers about a second device, which acts as a service-providing device. The first device may comprise a service discovery module which maintains a record with information about services and associated identifiers, and a list of identifiers about service-providing devices. The service discovery module enables the first device to distinguish a service offered by a service-providing device in vicinity from a service offered by a service-providing device not in vicinity. The resource discovery design may be defined such that, when used in combination with a wireless communications protocol, it controls certain services or tasks carried out or assigned to a device with a superior user-interface which is in vicinity of the device with a limited a user-interface requesting the service.

The device's capability description may include a basic initial message (a "pointer") which is stored at the receiver side as part of each device's description, for example.

The controlled device sends user-interface descriptions in some standardized format and receives and interprets inputs, commands and/or parameters sent back from the controlling device.

The controlling device understands and is able to receive the user-interface descriptions and to make them accessible to the user on demand or automatically, e.g. by displaying a menu or a list of all devices currently in vicinity. The
5 controlling device then forwards commands to the controlled device.

An example of the present invention is illustrated in connection with a preferred embodiment hereinbelow. In the following description, the invention is implemented and
10 described in a communications system using WML. The benefits of WML include: WML is a small, simple, XML-based "language"; WML has a relatively small and simple browser, that will soon be available on many mobile devices; WML's "deck-of-cards" metaphor maps perfectly to familiar
15 configuration paradigms ("property-sheets" or "tabs"); WML can be encoded very compact using either binary WML or tokenized WML. Most tags become single-byte items and strings are collected in a string-table. In the example given below the original WML file is 1.5kB, while the
20 tokenized form is only 652 bytes, even without compressing the string table. If the string table were compressed (e.g., using Lempel-Ziv, the same algorithm used in the popular .zip or .gzip tools), the resulting files are even smaller. In addition, WML has built-in variables replacement
25 functionality; and WML has timer functionality.

In order to signal that certain commands (and parameters) are to be sent to the controlled device, the WML-browser (or its underlying communication stack) must recognize URLs that use a special "protocol".

30 The protocol may be based on existing protocol, like:

HTTP (HyperText Transport Protocol, i.e. the Internet-WWW protocol) requests as specified in [RFC1738] and [RFC2068], in example:

```
http://<host>/<path>[;<params>][?<query>][#<anchor>]
```

5 FTP (file transfer protocol) in example:

```
ftp://<host>/<path>/<filename>
```

The gopher protocol, in which there have already been suggestions to extend the notation using additional schemes in example:

10 gopher://<host>/<path>/<filename>

The "file:"-protocol, which has already been widely adopted and incorporated into most WWW-browsers in example:

```
file://<host_name>/<local_path>/<filename>
```

15 (Note: the //<host_name> fragment is optional and - if not present - defaults to "this host" or "local host" which accesses a local file rather than a file or resource located at a remote server).

20 Similarly suggested, but not yet adopted, is a protocol that allows the control of and communication via "local" devices (serial ports, printer ports, smart-card readers, USB-ports, etc.) using for example:

```
device://<portname>/<cmd>[;<params>][?<query>][#<anchor>]  
e.g. device://COM1/setbaudrate;19200 to change the first  
communication port's serial speed to 19200 baud/s.
```

In addition, the present invention proposes a <comm> protocol to send commands to communicating devices that are "attached" using some short-range communication means (like IR or RF) using the following protocol:

5 <comm>://<device_id>[:<portnr>]/<prefix>/<cmd>[;<params>.]
<comm> refers to the network or communication means over which this command/request is to be sent, e.g. "IrDA" or "Bluetooth", "Hummingbird", etc. A parameter <device_id> is needed to provide communication means, which support multi-
10 party communication (i.e. not only 1:1 communication like IrDA V1) to address a specific device. An optional parameter <portnr> may also be added to specify a specific port, where more than one communication channel exists between communicating devices, or to select a non-default channel
15 for special purposes (e.g. for device monitoring, diagnosis, configuration, etc.).

This device-id may be derived from the concatenation of a manufacturer identification and a model identification (e.g. "sony_cdp_990X") with some user-specified arbitrary
20 name or physical location (e.g. "mmoser_livingroom").

A parameter <prefix> (which may have the same syntax as a URL-<path>) is used to group commands into some tree-structure, e.g. if one looks at a printer's menu-tree (execution tree) as shown in Figure 2.

25 A parameter <cmd> (or the last path-fragment) specifies the actual command, while a parameter <params> describes optional parameters of the above command. Examples implementing this protocol are represented below:
bluetooth://sony_cdp_990_mmoser_livingroom/cd_titles/add;BMW
30 :Exodus

bluetooth://sony_cdp_990_mmouser_livingroom/play_mode/select;
shuffle.

To perform resource discovery, a communicating device
sends a command string in the following format:

5 wml_ui=<device_id>/[<path>]/<command>[;<parameters>]

An example implementing this protocol is shown below:

wml_ui=sony_cdp_990_mmouser_livingroom/main_menu

10 Resource discovery is performed so a device may describe
its resources to its peers. In the above example wml_ui is a
predefined service name (standardized) and
sony_cdp_990_mmouser_livingroom/main_menu

15 is an initial URL. The URL decomposes into a "host name"
sony_cdp_990_mmouser_livingroom which is a logical name that
has to be mapped to the physical address of the device, and
the remainder (command and optional parameters) which is the
actual request to be sent to the device. In the above
example, the command "main_menu" is issued (without
parameters) to return to the initial main menu.

20 The above URL is stored as part of the description that
all devices maintain about other devices currently in
vicinity. If the user-interface description file size is
small enough, the device may send the entire user-interface
description immediately following the resource discovery
phase.

25 Devices with a means to display the user-interface
description act as service providers and controllers for
devices with a limited user-interface. If there are a

plurality of devices with limited user-interfaces in vicinity of a device that serves as the controller, the plurality of devices together with their user-interface capability-description may be displayed on the controller's screen for selection. The controller's display may typically include a system-menu with a selection button labeled "act as user-interface for a nearby device". Clicking the selection button pops up a list of "controllable" devices. The user then picks a controllable device from that list, whereupon the user-interface-URL (wml-user-interface-URL) is transmitted to the selected device to carry out the method according to the present invention.

The transmission of the user-interface-URL triggers the transfer of the main-control menu of the controlled device from the controlled device to the controlling device(controller). WML uses a "deck of cards" metaphor, which maps to "property sheets", a visualization technique that is often used to edit object attributes and parameters.

An example is illustrated in Figures 3-5, where a CD-player is controlled by a controller having a display 31. The user-interface 30 shown contains a deck with only 4 cards: a welcome & overview card 36, a card to edit CD names 33, a card to select the play mode 34 and a generic help card 37. The corresponding WML document is shown in Figure 10.

When a WML-browser is used by the controller, the deck layout is displayed as window 30 on the screen 31 of the controller, as shown in Figure 3. When, for example, the user clicks on the CD-labels link 32 or the user selects the "CD_names"-tab 33, a card 40 to edit CD-titles is displayed,

as shown in Figure 4. Here the user may enter a CD-name in an insert field 41 using the input facility of the controller device, e.g., a full-blown keyboard, pen-input, voice-input, or the like.

5 Selecting the play-mode link 35 (or play_mode-tab 34) pops up a window 50 as shown in Figure 5. Again, the user selects from the different play modes by clicking on one of the radio buttons 51 using the controller device's input facility.

10 The commands and parameters are transmitted on user command, e.g., the user clicks the OK-button 52 on the CD-player play-modes window 50 of Figure 5, instructing the controller's browser to submit the following URL, in example:

15 bluetooth://sony_cdp_990/playmode/select;Normal

20 The above URL would switch the play mode of the CD palyer to "Normal". Based on the protocol (here "bluetooth") the controller device's communication stack recognizes that this is not a normal request, to be sent out via TCP/IP and the Internet, but rather that this request must be intercepted and forwarded to the local (bluetooth) communication stack.

25 The host specification of the URL is then used to address the specified device (here a "Sony CD-player model 990") and the remaining URL-part (the optional path, the command and the optional parameter(s)) are then sent to the specified device.

 The addressed device must have a simple "command-
interpreter" that is able to recognize and execute received
commands by analyzing submitted URLs, i.e. extracts and

recognizes certain command strings plus optionally separates and converts parameters, etc. The complexity and robustness of this interface is completely up to the manufacturers discretion, and therefore may vary according to manufacturer and model number.

The user may optionally receive a visual or audible confirmation when he/she presses a button or clicks on a link and thus "submits a request" to the controlled device. For this reason the controlled device may react (this is an optional step) and return some response to the submitted request, since simply receiving a time-out message in the browser with no success/failure indication whatsoever is generally not sufficient.

The flexibility, size, and complexity of this response is completely up to the manufacturers discretion, the devices capabilities, and resources. For example, the device may: return data to display a specific card confirming the reception of the command and describing the results of its execution; return data to display the complete user-interface-"deck" again with certain texts or default choices now adapted according to the status changes caused by the previous command; or return just a minimal OK, or error, page depending on the command's result. The user may then navigate back to the control stack by pressing "return" in the browser. Many other responses or combinations of the above responses are possible.

One exemplary implementation of the present invention is described in connection with Figure 7A. Figure 7A is a block diagram illustrating the components, both logical components and physical components, of a device 70 with a limited user-interface. Figure 7D illustrates building

blocks of the hardware layer. The device 70 comprises a transmitter driver 73 for sending information via an output channel 81 to another device, such as a device with more powerful user-interface capabilities, and a receiver driver 74 for receiving information from other devices via input channel 82. The channels 81, 82 may be any kind of channels, such as an IR, RF, or body network channels, for example. These channels do not have to be the same. It is conceivable, for example, that the output channel 81 is an infrared channel whereas the input channel 82 is a RF channel.

The transmitter driver 73 and receiver driver 74 communicate with a medium access control (MAC) unit 72. The MAC layer is well defined by international standards (cf. ISO OSI (Open Standards Interconnection) reference model as described in A.S. Tannenbaum's book "Computer Networks", for example). The MAC unit 72 is preferably a conventional unit employed in communication systems to control the MAC layer. Note that a MAC layer is a logical division, and would be only logically divided from other parts of the protocol implemented at 71 on the same physical device. The MAC unit 72 may be employed to detect and/or avoid collisions between transmitted data packets received simultaneously from different devices. In the present embodiment the MAC unit 72 is used to send and receive packets. In many cases, such a MAC unit 72 may not be required.

Device 70 and it's components may be powered via a power plug, a solar cell, a battery, or any other suitable means which are purposely left out for clarity.

With reference to Figure 7D, the device 70 may comprise a bus 21 enabling communication between some of the device's components/units, such as the central processing unit (CPU) 77, memory 76, the communication hardware 22, 23 and any other device specific hardware 20 through a hardware interface 25. The device 70 may also have a user-interface unit 24 for interaction with a user (e.g. a small LCD display and some input keys).

During remote access, user-interface information is supplied from a user-interface manager 71 to the MAC unit 72 and transmitted to the (remote) controlling device via transmitter driver 73 and channel 81. User-interface information comprises any information needed by the controlling device with the more powerful user-interface capabilities in order to provide a superior user-interface to the controlled device for a user. Depending on the implementation, the user-interface information may be information that describes a full user-interface (see item 19 in Figure 1), or describes a partial user-interface (item 63 in Figure 6).

Commands entered at the controlling device by the user are received via channel 82 by the receiver driver 74 and forwarded to MAC 72 and to user-interface manager 71. To control the device 70 the user-interface manager 71 may communicate directly (item 83) or indirectly via an optional application programming interface 79 (API) and a device specific application 78 with hardware drivers 26, and consequently with device specific hardware 20 that provides and embodies a device's purpose and/or functionality (be it a video cassette recorder, a coffee machine, a printer, a stereo device, etc.). The actual activity or functionality

of the device 70 is independent of the present design; using the present design provides that this activity may be controlled and/or monitored from another device.

Here, the MAC 72, the user-interface manager 71 and the application 78 are logical constructs. They may be implemented on separate devices or incorporated into a program stored in memory 76. If incorporated into a program, the device 70 may physically be the same as other devices, except for the fact that it comprises the above-mentioned program. The program comprises instructions that when processed by the CPU 77, instruct the device 70 to perform the operations necessary to implement the present invention.

The user-interface manager 71 exchanges the user-interface information, allowing the user-interface to be provided to the remote controlling device and control information and/or parameters to be received from the device in response to user input.

Referring now to Figure 8, a flow chart is used to describe the steps that are performed by a device 70 with a limited user-interface. The device 70 also transmits service information (service announcements) to one or more devices within vicinity periodically in step 84. This service announcement process may optionally run in the background, as indicated by the dashed loop 84a. When the device receives information from another device (second device), it categorizes the information into one of several categories. In the present example there are three categories: service information; request to send user-interface (UI) information; and user input. When the input contains service information, then the received information

is used to update the device's own list of services in step 89. The service information may be used by the second device to transmit information about its capabilities. The service information is stored in a list for later retrieval. Alternatively, the information may be retrieved only if needed, for example. When the input is identified to be a request to send user-interface (UI) information then the device sends its UI information to the second device in step 85. Finally, when the information comprises a user input received from the second device, then the device 70 processes and/or executes this user input in step 86. In an optional step 90, a confirmation signal is returned to the second device to indicate to the user that the controlled device processed or executed the command. Alternatively (see the dashed arrow at the lower right-hand side) the device 70 may, if instructed, send an entire or partial UI description again which is updated to reflect results or status changes caused by the prior command. Finally, the device 70 returns to monitoring mode in step 87, and awaits additional information from the second device or any other device in vicinity.

The embodiment described in connection with Figure 8 implements a procedure where the second device (i.e., the device with a superior or more powerful user-interface) triggers the device 70 with a limited user-interface to send user-interface information, which may, for example, be initiated when a user points the second device into the direction of the computer device 70 with limited user-interface, or simply brings the second device in vicinity of the device 70.

With reference now to Figures 7B and 7C, an embodiment of a controller device 700 - i.e. a device that has a more powerful user-interface - is illustrated. Figure 7B illustrates typical logical and software-layer building blocks and Figure 7C illustrates building blocks of the hardware layer. As shown in Figure 7B, the controller device 700 comprises a MAC protocol handler 720, a transmitter driver 730, and a receiver driver 740 for communication with a remote device (not shown). In addition, there is a user-interface manager 710 and a user-interface driver 750 to communicate with the user-interface.

As illustrated in Figure 7C, the device 700 comprises a bus 706 (e.g. a back plane bus or a cable bus) for interconnecting a transmitter 701, receiver 702, memory 703, CPU 704, and user-interface 705 connected to a display and/or keyboard or, pointing device, for example.

Figure 9 is a flow chart illustrating the corresponding steps performed by the controller device 700 during operation. The controller device 700 background monitors 102 and receives service information from a device with a limited user-interface in step 103. If there is a plurality of computer devices with limited user-interfaces (controllable devices) within vicinity of the controller device 700, then a list of these controllable devices is displayed for the user in step 92. In step 91 the user may also optionally request the list. The user then selects a controllable device he wants to control (controlled device) or interact with from the list in step 93. If there is only one controllable device, or if the controller device 700 otherwise knows which controllable device the user wants to interact with, then steps 91-93 may be bypassed as indicated

by arrow 94. Next, a request to send user-interface information is transmitted to the controlled device in step 95. The controlled device responds by sending the requested user-interface information, as illustrated in step 85 of Figure 8. After the user-interface information is received by the controller device in step 96, a corresponding user-interface is displayed to the user in step 97. This may, for example, be done by displaying the user-interface to the user, by reading text to the user, by printing some information, etc. The controller device 700 then waits to receive user input in step 98, and corresponding commands are then sent back to the controlled device in step 99. A confirmation signal may optionally be received from the controlled device and provided to the user (not illustrated in Figure 9). The controller device 700 then waits for additional user input for a predetermined period of time in step 100, returning to step 98 if additional user input is received. If no additional user input is received during the predetermined period in step 100, the controller device 700 then awaits additional user-interface information in step 101 for a predetermined period of time. If the additional user-interface information is transmitted the interface information is received, returning to step 96. If the user-interface information is not received, the controller device 700 returns to background monitoring 102 to receive service information in step 103.

In an alternative embodiment, the controlled device initiates the process. In this case, the controlled device sends user-interface information to a particular second device. If there is a plurality of devices within vicinity of the controlled device, then the controlled device or the user selects one. Before user-interface information is sent

out, the device or user may determine whether there is another device in vicinity which has the best user-interface. This may be done by simply looking at the information stored in a list of available devices in vicinity with corresponding services. If no list is maintained, the controlled device transmits the user-interface information hoping there is a device in vicinity which is able to receive and interpret the user-interface information. The second device receives the user-interface information and provides a corresponding user-interface to the user. The user then uses this user-interface to input information. The user's input is then sent to the controlled device where the input is processed and/or executed. In an optional step, confirmation feedback is returned to the second device to indicate to the user that the controlled device processed or executed the command.

An extension of the above described design is described below with reference to Figure 6. The user-interface source 67 and the command target 60 are separate, as illustrated in Figure 6. The controlled device 60 does not necessarily have to supply the entire user-interface description (which could become quite large - e.g. when lots of graphical elements are employed) but only minimal required information. In this case, the device 60 just sends a partial user-interface 63 (e.g. a text-only version) via the wireless communications path 66 to the controller 62, or the controlled device 60 supplies only an initial user-interface description 63 (e.g. a URL) or "pointer".

The actual user-interface 65 or the additional information (e.g. graphics 69) are then retrieved from other locations, for example, a file pre-installed on the

controller or a WWW server on the Internet, and combined into a unified user-interface presentation 68 on the screen 14 of the device 62. In the illustrated example the actual user-interface is fetched from a WWW server 67 using an HTTP request 64. This allows the user-interface description 63 stored in the device 60 to be very small and only requires the implementation of a simple command and parameter parsing capability in the device 60 itself.

Another, more complex user-interface implementation allows the controlled device to implement only basic commands, using scripting techniques. These commands are combined by the controller to form more powerful compound commands and also automate certain repetitive tasks. A browser equipped with some flexible scripting language would, for example, automate tasks like the following:

Ask the user to insert a CD

Once a CD is inserted, request and display the current CD's identification code

Search that CD's ID-code in a Web-based database (e.g. "CDDB")

Copy the title and author of that CD into the title field of the CD-player's User Interface and submit that request.

Start over.

Thus, the user simply inserts one CD after the other into a CD-player (controlled device in the present example) while the PC (controller device in the present example) searches and automatically programs the corresponding CD-labels into the CD-player.

The present invention may also incorporate the translation of user-interface controls. In this case, the controlling device acts as a format translator, i.e. converts user-interface elements to/from different formats or media. The controlling device may, for example, provide speech synthesis and "read" some text message to a vision impaired or occupied person (e.g. during car-driving). Similarly, spoken commands to enter data into an input field or activate a control-element (a spoken "button click") may be converted. Such conversion involves user-interface representation formats that do not make any assumptions about the actual physical user-interface capabilities available in a device, but rather specify abstract functional levels of controls, e.g. WML does not specify minimal display sizes in pixels nor require a minimum number of fonts to be available for menus and text-output, but rather specifies "selection", "input" and "activation" capabilities. Menu-texts may either be displayed or read to the user and the user can type his/her answer or simply speak to the device.

If a manufacturer relies on the fact that seldom used functions need not be controlled via a device's front-panel but rather using a better suited external device, the amount of user-interface code for complicated, seldom used functions can be drastically reduced, which yields much easier, less error-prone software development and consequently shorter time-to-market and considerable price benefits due to quicker development. A controllable device in accordance with the present invention is simpler and less expensive.

Given a minimal communication range (say 15 - 20m), the device to be controlled need not even be in the same room. It could be in the basement or on the roof (e.g. heating, air condition, antennas, cable tuners, satellite receivers, etc.).

The standardized communication channel between a controlled device and a controller can be extended (this technique is usually known as "proxy") to allow the bridging of larger distances and to allow remote-control and remote-diagnosis capabilities. For example, building and heating control might require special knowledge such that even a good user-interface does not enable a customer to correctly adjust certain settings. By temporarily relaying the user-interface to a specialized firm, some external specialist may configure or diagnose a remote system. Such world-wide access to home equipment is convenient for a "normal" user, too, because it will allow the user to control home systems from a remote location.

HTML can optionally be used as the exchange format. This allows more flexible, more powerful user-interfaces but would be less elegant and compact than an WML implementation. Any other markup language may also be used.

If the host-device (the controller) supports drag-and-drop capabilities, this functionality may be exploited - e.g. to copy an appointment from a PDA's agenda to the downloaded user-interface of a wrist-watch. The drag and drop capabilities work between host-applications and downloaded user-interfaces, as well as between devices. If more than one device is currently controlled by the same controller, that host may act as an intermediate, i.e. one could drag and drop information between two controlled

devices (e.g. copy a phone number stored in a wrist-watch to a mobile phone).

Many of the benefits of the present invention become obvious when reading the specification. The present design allows a user to make use of larger, better readable displays (e.g., a larger color graphics display), superior/faster input capabilities (e.g., a full-fledged keyboard, or pointing device), and better suited I/O interfaces (e.g. a printer or audio system). It is certainly easier to program a mobile phone or a wrist-watch using a PDA or a computer screen and a keyboard than keying-in data on a tiny numeric keyboard. According to the present invention, the user may use a mouse, pen, or any other pointing device provided by the controller device to control features of a device which lacks such a mouse, pen, or other pointing device.

The present invention may in part or as a whole be implemented by or on a special computer device or a general purpose computer device. This may be done by implementing the invention in some form of computer program. Computer program in the present context means an expression, in any language, code or notation, of a set of instructions intended to cause a computer device to perform a particular function either directly or after either or both of the following:

- a) conversion to another language, code or notation; and
- b) reproduction in a different material form.

While the present invention has been described in detail with reference to the preferred embodiments, they represent

more exemplary applications. Thus, it is to be clearly understood that many variations can be made by anyone having ordinary skill in the art while staying within the scope and spirit of the present invention as defined by the appended
5 claims. Although specific terms are used herein, the description uses terminology in a generic and descriptive sense only and not for purposes of limitation.

CLAIMS

1 1. A method for controlling a first computer device
2 having a limited user-interface using a remote second
3 computer device, whereby the first and second computer
4 devices communicate via a wireless communication channel and
5 support a common communications protocol, comprising the
6 steps of:

7 transmitting user-interface information from the first
8 computer device to the second computer device;

9 providing a user-interface at the second computer device
10 corresponding to the user-interface information;

11 receiving user input via the user-interface at the second
12 computer device;

13 transmitting user command information corresponding to
14 the user input from the second computer device to the first
15 computer device; and

16 executing the corresponding user commands at the first
17 computer device.

1 2. The method recited in Claim 1, wherein the user-
2 interface information is a standardized user-interface
3 description.

1 3. The method recited in Claim 1, wherein the second
2 computer device transmits a list of available services to
3 the first computer device prior to said first computer
4 device sending user-interface information to said second
5 computer device.

1 4. The method recited in Claim 1, wherein the wireless
2 communication channel is automatically established between
3 the first computer device and the second computer device.

1 5. The method recited in Claim 1, wherein the second
2 computer device comprises a display that provides the user-
3 interface by displaying said user-interface on the display.

1 6. The method recited in Claim 1, wherein the second
2 computer device comprises a keyboard for receiving the user
3 input.

1 7. The method recited in Claim 1, wherein a markup
2 language is used for transmitting the user-interface
3 information from the first computer device to the second
4 computer device.

1 8. The method recited in Claim 7, wherein Wireless Markup
2 Language (WML) is used as the markup language.

1 9. The method recited in Claim 1, wherein the second
2 computer device provides the user-interface by using browser
3 software to display at least a portion of the user-interface
4 information.

1 10. The method recited in Claim 1, wherein a wireless
2 session protocol is used for transmitting the user command
3 information to the first computer device.

1 11. The method recited in Claim 1, wherein a hypertext
2 transport protocol (HTTP) is used for transmitting the user
3 command information to the first computer device.

1 12. The method recited in Claim 1 comprising the
2 additional step of sending a confirmation signal from the
3 first computer device to the second computer device
4 following the step of executing the corresponding user
5 commands at the first computer device.

1 13. The method recited in Claim 12, wherein the
2 confirmation signal indicates whether the execution of the
3 user command information at the first computer device was
4 successful.

1 14. The method recited in Claim 1, wherein the wireless
2 communications channel is initiated by the first computer
3 device.

1 15. The method recited in Claim 1, wherein, prior to
2 said step of transmitting the user-interface information,
3 the second computer device transmits a request signal to the
4 first computer device requesting the user-interface
5 information.

1 16. A system for remotely controlling devices, said
2 system comprising:

3 a first computer device comprising a limited user-
4 interface, a first processor, a first transceiver, a first
5 memory, and a first user-interface manager;

6 a second computer device comprising a second user-
7 interface, a second processor, a second transceiver, a
8 second memory, and a second user-interface manager; and

9 a wireless communications channel for communication
10 between the first computer device and the second computer
11 device, wherein

12 the first user-interface manager controls the
13 transmitting of user-interface information to the second
14 computer device via the first transceiver, the wireless
15 communications channel and the second transceiver;

16 the second user-interface manager controls the second
17 user-interface in accordance with the user-interface
18 information;

19 the second computer device receives user input via the
20 second user-interface;

21 the second computer device transmits user command
22 information corresponding to the user input to the first
23 computer device via the second transceiver, the wireless
24 communications channel, and the first transceiver; and

25 the first computer device executes the user command
26 information received from the second computer device.

1 17. The system recited in Claim 16, wherein the first
2 transceiver and the second transceiver automatically
3 establish the wireless communication channel between the
4 first computer device and the second computer device.

1 18. The system recited in Claim 16, wherein the second
2 computer device further comprises a display that displays
3 the user-interface information on the second user-interface.

1 19. The system recited in Claim 16, wherein the second
2 computer device further comprises a keyboard that receives
3 the user input.

1 20. The system recited in Claim 16, wherein the second
2 computer device provides the user-interface by using browser
3 software to display the user-interface information on the
4 second user-interface.

1 21. The system recited in Claim 16, whereby the second
2 computer device further enables a user to initiate a request
3 by the second computer device of the user-interface
4 information from the first computer device.

1 22. The system recited in Claim 16, further comprising
2 a third computer device, said third computer device
3 comprising a third processor, a third transceiver, and a
4 third memory storing part for storing the user-interface
5 information.

1 23. The system recited in Claim 22, wherein a first
2 part of the user-interface information is transmitted by the
3 first computer device to the second computer device and a
4 second part of the user-interface information is transmitted
5 by the third computer device to the second computer device.

1 24. The system recited in Claim 23, wherein the first
2 part of the user-interface information is a pointer
3 identifying a portion of the third memory storing part where
4 the second part of the user-interface information is stored.

1 25. A computer program product comprising a computer
2 readable medium, said computer readable medium comprising
3 thereon computer program code, wherein when said program
4 code is loaded into a computer device which comprises a
5 limited user-interface, a processor, a transceiver for
6 interfacing through a wireless communications channel with a
7 remote computer device, a memory, and a user-interface
8 manager, the computer device is instructed to execute a
9 procedure comprising:

10 (a) transmitting user-interface information through
11 the wireless communications channel to the remote
12 computer device;

13 (b) receiving a user input command that a user
14 generated at the remote computer device via the
15 wireless communications channel;

16 (c) executing the user input command; and

17 (d) transmitting a confirmation signal to the remote
18 computer device through the wireless communications
19 channel.

1 26. A computer program product comprising a computer
2 readable medium, said computer readable medium comprising
3 thereon computer program code means, wherein when said
4 program code is loaded into a computer device which
5 comprises a user-interface manager, a processor, a memory,
6 and a transceiver for interfacing through a wireless
7 communications channel with a remote limited user-interface
8 computer device, the computer device is instructed to
9 execute a procedure comprising:

10 (a) receiving user-interface information from the
11 limited user-interface computer device through the
12 wireless communications channel;

13 (b) providing a user-interface under the control of the
14 user-interface manager, said user-interface
15 corresponding to the received user-interface
16 information;

17 (c) receiving user input via said user interface;

18 (d) sending user input commands corresponding to the
19 user input via the wireless communications channel to
20 the limited user-interface computer device;

21 (e) receiving a confirmation signal via the wireless
22 communications channel from the limited user-interface
23 computer device, said confirmation signal indicating
24 that said input commands have been executed by the
25 limited user-interface computer device; and

26 (f) providing a notification to a user, said
27 notification corresponding to the confirmation signal.

ABSTRACT

A method and apparatus for controlling a computer device with a limited user-interface via a remote computer device having a more powerful user interface. Both computer devices are interconnected via a wireless communication channel and both computer devices support a common communications protocol. User-interface information is sent from the computer device with a limited user-interface to the remote computer device to provide a user-interface at the remote computer device for receiving user input at the remote computer device. The user input controls the computer device with a limited user-interface to execute commands therein corresponding to the user input.

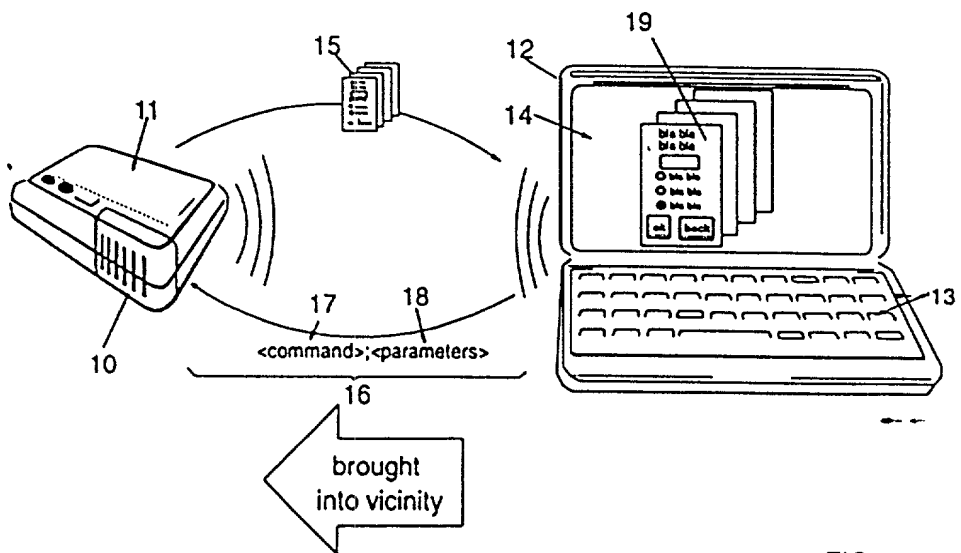


FIG. 1

/default-fonts		
	/draft	
		/style
		/size
	/letter-quality	
		/style
		/size
/interface		
	/serial	
		/baud-rate
		/parity
		...
	/parallel	
		...
/formats		
	/JCL	
		...
	/PostScript	
		...
...		

FIG. 2

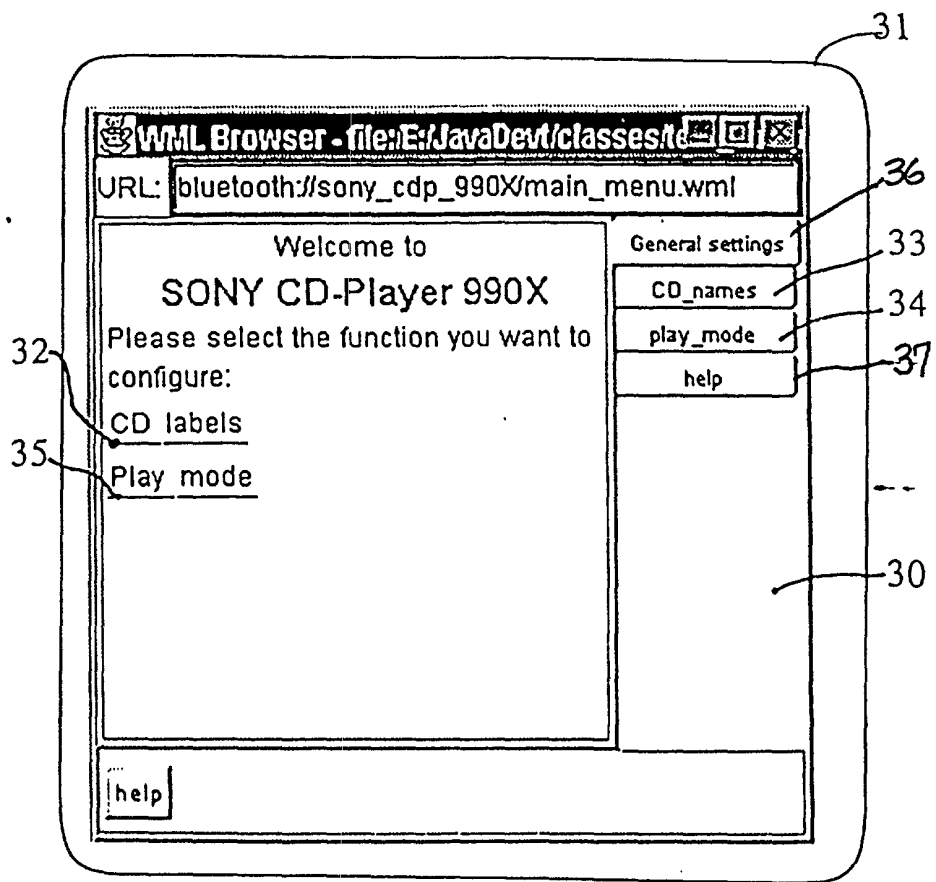


FIG. 3

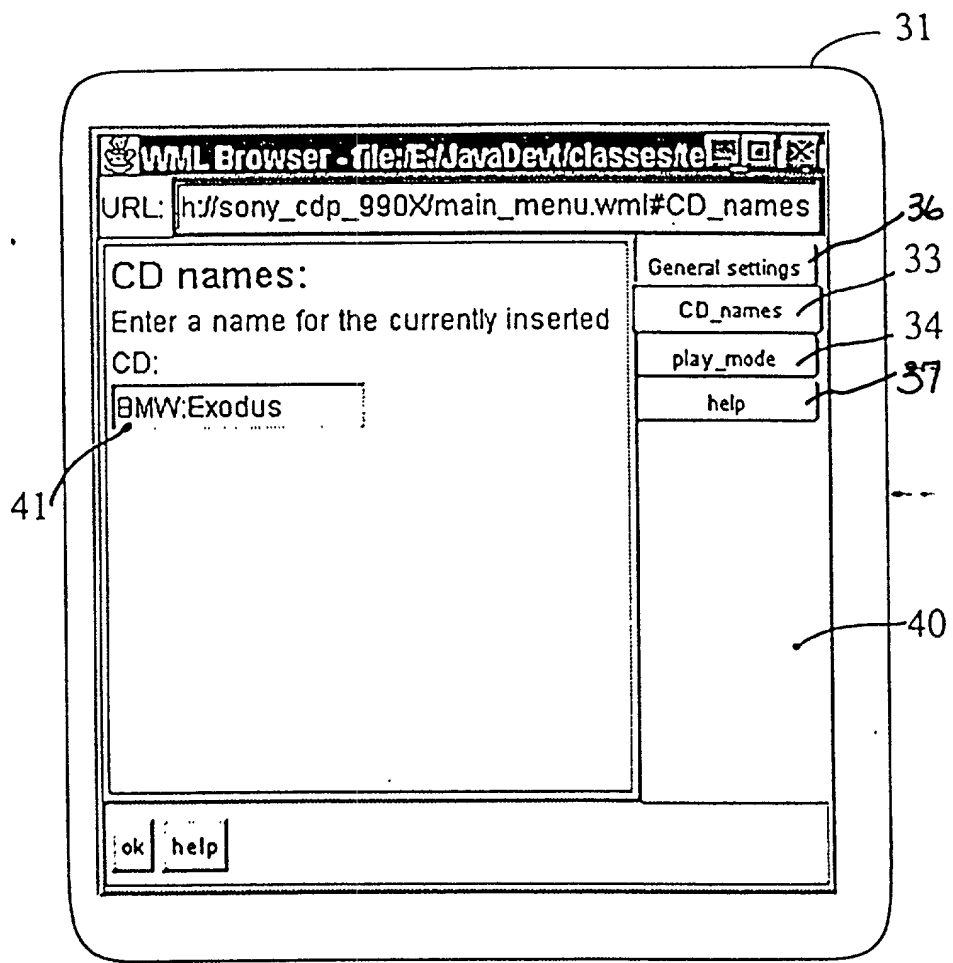


FIG. 4

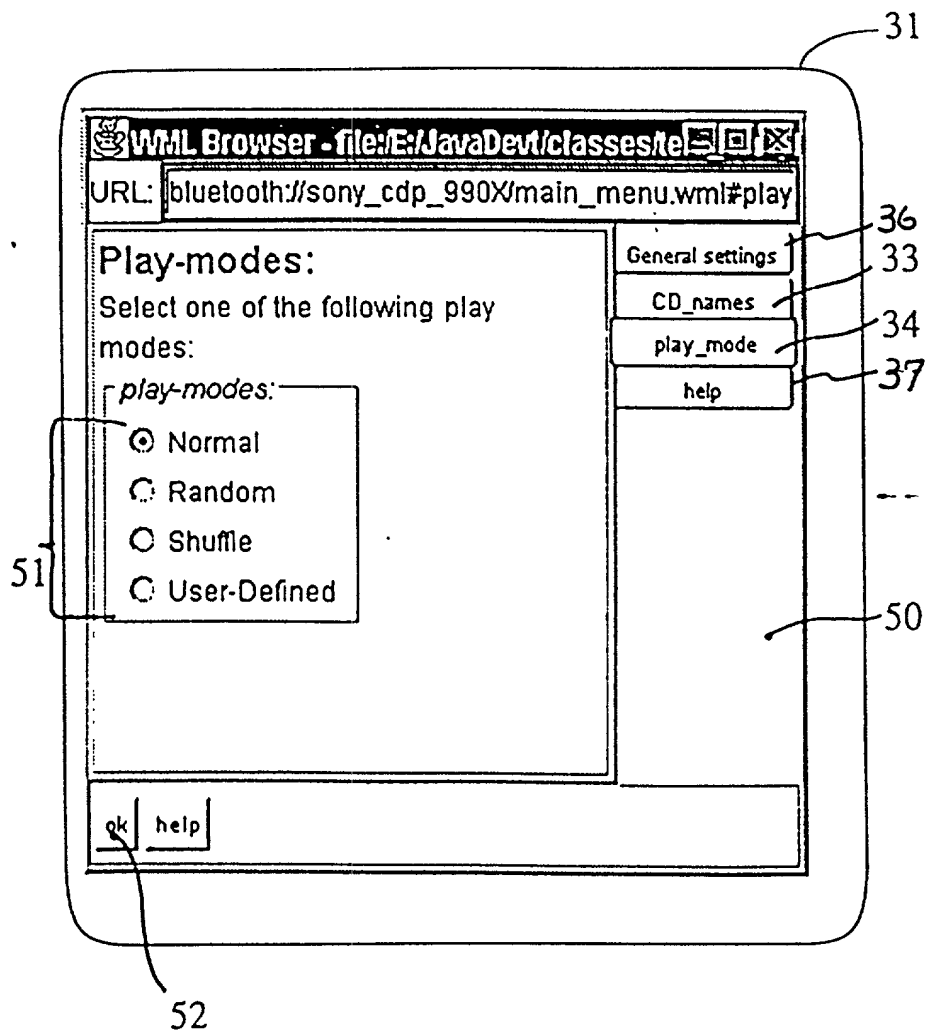


FIG. 5

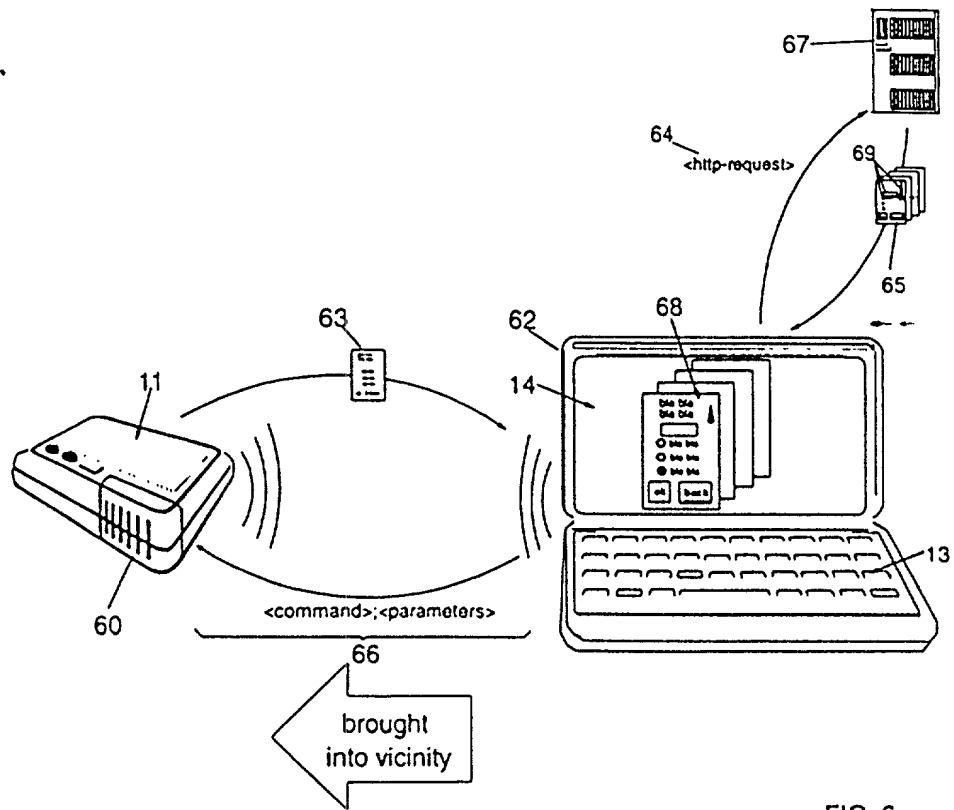


FIG. 6

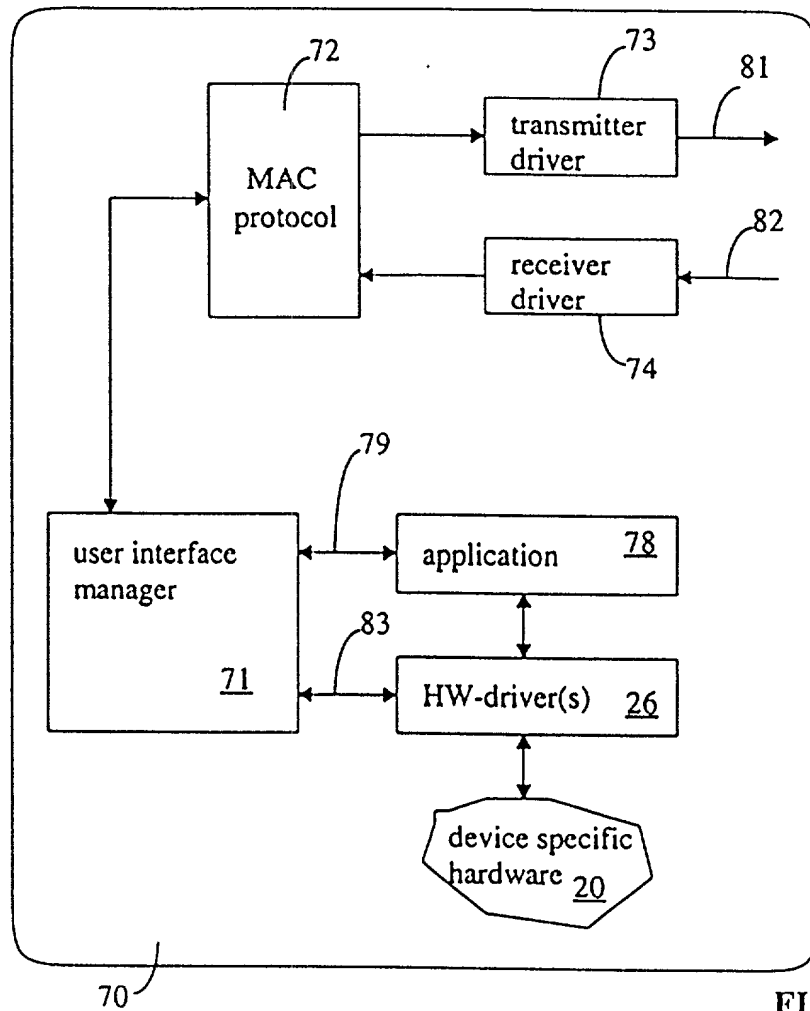


FIG. 7A

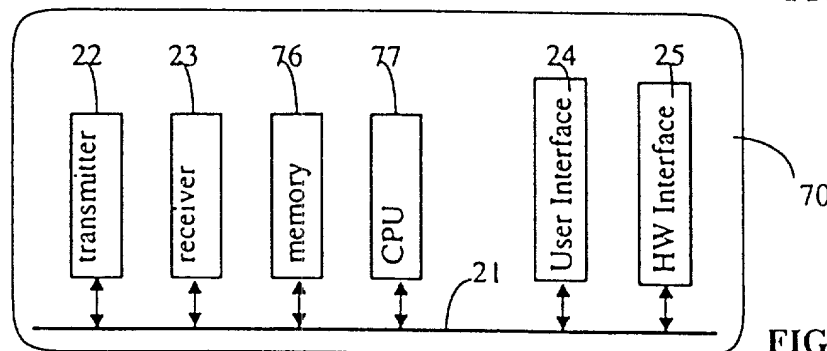


FIG. 7D

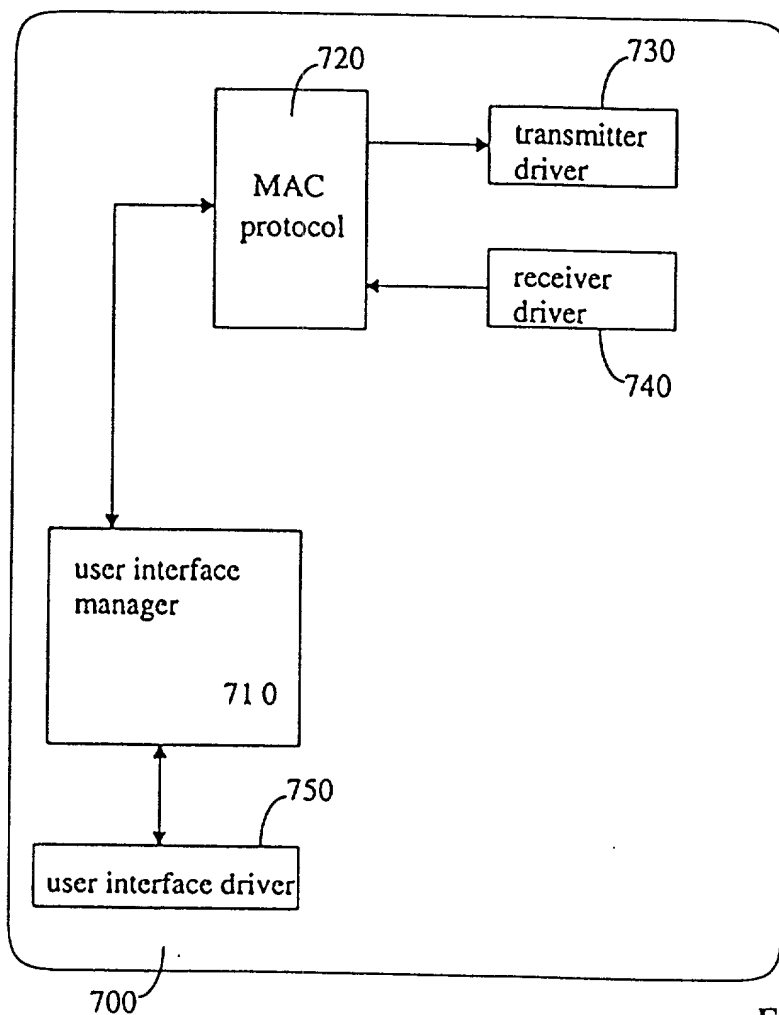


FIG. 7B

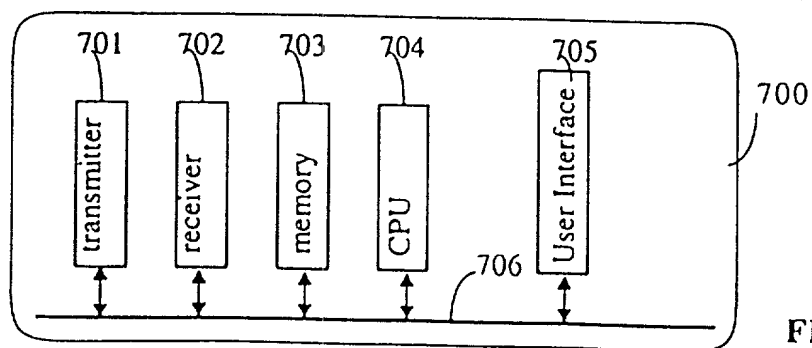


FIG. 7C

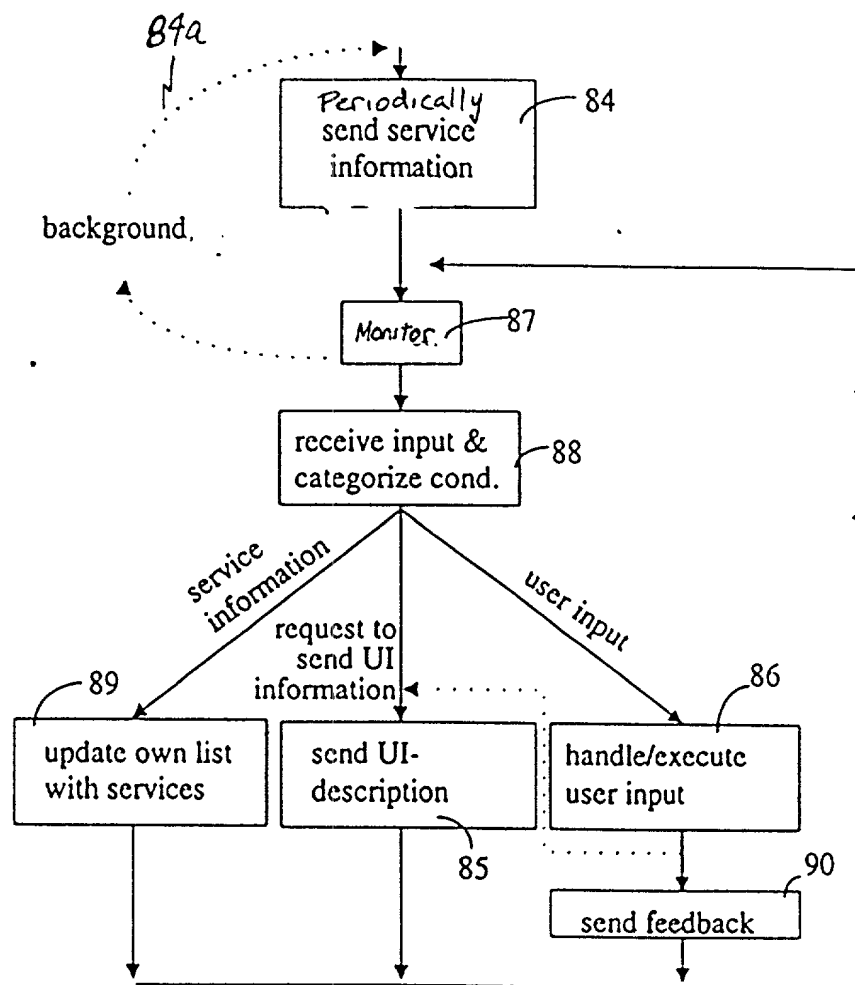


FIG. 8

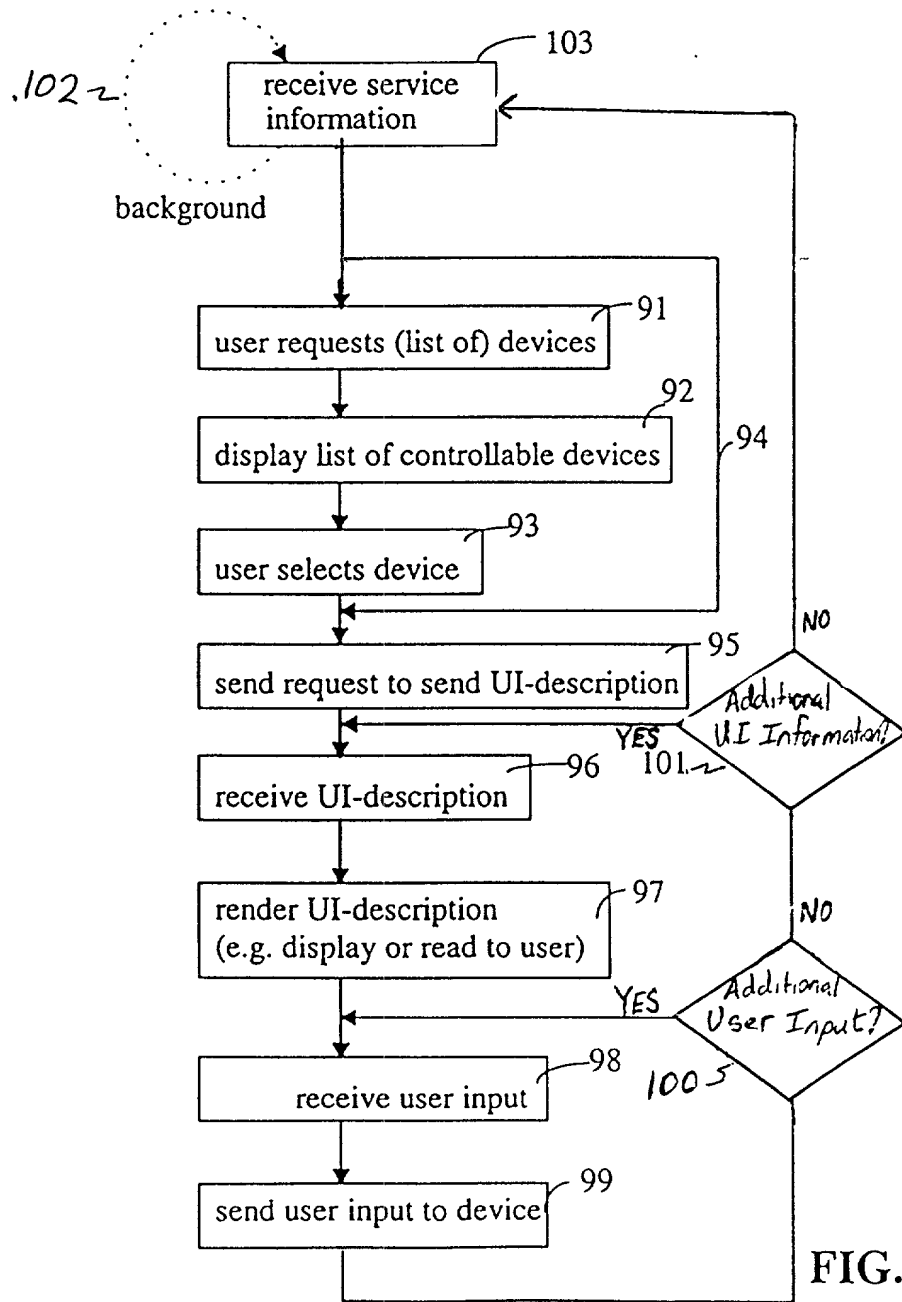


FIG. 9

```

<?xml version="1.0"?>
<!DOCTYPE WML SYSTEM "wml.dtd">
<WML>
  <TEMPLATE>
    <DO TYPE="HELP" LABEL="help"> <GO URL="#help"/> </DO>
  </TEMPLATE>
  <CARD NAME="General settings" NEWCONTEXT="TRUE">
    <BR ALIGN="CENTER"/>
    Welcome to
    <BR ALIGN="CENTER"/>
    <BIG><B>SONY CD-Player 990X</B></BIG>
    <BR/> <BR/> <BR/>
    Please select the function you want to configure:<BR/>
    <A TITLE="set/edit CD labels">CD labels<GO
      URL="#CD_names"/></A>

    <BR/>
    <A TITLE="select play mode">Play mode<GO
      URL="#play_mode"/></A>
  </CARD>
  <CARD NAME="CD_names">
    <BIG><B>CD names:</B></BIG>
    <BR/>
    Enter a name for the currently inserted CD:
    <BR/>
    <INPUT TYPE="TEXT" KEY="CD_NAME" FORMAT="MMMMM"
      EMPTYOK="TRUE"/>
    <DO TYPE="ACCEPT" LABEL="ok">
      <GO
URL="bluetooth://sony_cdp_990/cd_titles/add;$(CD_NAME)"/>
    </DO>
  </CARD>
  <CARD NAME="play_mode">
    <BIG><B>Play-modes:</B></BIG>
    <BR/>
    Select one of the following play modes:
    <BR/>
    <SELECT TITLE="play-modes:" KEY="PLAYMODE"
      DEFAULT="Normal">
      <OPTION VALUE="Normal" TITLE="Normal"/>
      <OPTION VALUE="Random" TITLE="Random"/>
      <OPTION VALUE="Shuffle" TITLE="Shuffle"/>
      <OPTION VALUE="UserDef" TITLE="User-Defined"/>
    </SELECT>
    <DO TYPE="ACCEPT" LABEL="ok">
      <GO
URL="bluetooth://sony_cdp_990/playmode/select;$(PLAYMODE)"/>
    </DO>
  </CARD>
  <CARD NAME="help">
    Some help text here...
  </CARD>
</WML>

```

FIG. 10

COMBINED DECLARATION AND POWER OF ATTORNEY

(ORIGINAL, DESIGN, NATIONAL STAGE OF PCT, SUPPLEMENTAL,
DIVISIONAL, CONTINUATION OR CIP)

As a below named inventor, I hereby declare that:

TYPE OF DECLARATION

This declaration is of the following type: *(check one applicable item below)*

- ☒ original
- ☐ design
- ☐ supplemental

NOTE: If the declaration is for an International Application being filed as a divisional, continuation or continuation-in-part application do not check next item; check appropriate one of last three items.

- ☐ national stage of PCT

NOTE: If one of the following 3 items apply then complete and also attach ADDED PAGES FOR DIVISIONAL, CONTINUATION OR CIP.

- ☐ divisional
- ☐ continuation
- ☐ continuation-in-part (CIP)

INVENTORSHIP IDENTIFICATION

WARNING: If the inventors are each not the inventors of all the claims an explanation of the facts, including the ownership of all the claims at the time the last claimed invention was made, should be submitted.

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (*if only one name is listed below*) or an original, first and joint inventor (*if plural names are listed below*) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TITLE OF INVENTION

METHOD AND APPARATUS FOR PROVIDING A MORE POWERFUL
USER-INTERFACE TO A DEVICE WITH A LIMITED USER-INTERFACE

SPECIFICATION IDENTIFICATION

the specification of which: *(complete (a), (b) or (c))*

- (a) ☒ is attached hereto.
- (b) ☐ was filed on _____ as ☐ Serial No. 0 / _____ or ☐ Express Mail No., as Serial No. not yet known _____ and was amended on _____ *(if applicable)*.

NOTE: Amendments filed after the original papers are deposited with the PTO which contain new matter are not accorded a filing date by being referred to in the declaration. Accordingly, the amendments involved are those filed with the application papers or, in the case of a supplemental declaration, are those amendments claiming matter not encompassed in the original statement of invention or claims. See 37 C.F.R. 1.67.

- (c) ☐ was described and claimed in PCT International Application No. _____ filed on _____ and as amended under PCT Article 19 on _____ *(if any)*.

ACKNOWLEDGMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. §1.56.

- ☐ In compliance with this duty there is attached an information disclosure statement in accordance with 37 C.F.R. 1.98.

PRIORITY CLAIM (35 U.S.C. §119(a)-(d))

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

(complete (d) or (e))

- (d) ☐ no such applications have been filed.
- (e) ☒ such applications have been filed as follows.

NOTE: Where item (c) is entered above and the International Application which designated the U.S. itself claimed priority check item (e), enter the details below and make the priority claim.

**A. PRIOR FOREIGN/PCT APPLICATION(S) FILED WITHIN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS APPLICATION
AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. §119(a)-(d)**

COUNTRY (OR INDICATE IF PCT)	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. 119
EPO	99113414.9	12 July 1999	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO

**CLAIM FOR BENEFIT OF PRIOR U.S. PROVISIONAL APPLICATION(S)
(34 U.S.C. § 119(e))**

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

PROVISIONAL APPLICATION NUMBER

FILING DATE

**ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION**

NOTE: If the application filed more than 12 months from the filing date of this application is a PCT filing forming the basis for this application entering the United States as (1) the national stage, or (2) a continuation, divisional, or continuation-in-part, then also complete ADDED PAGES TO COMBINED DECLARATION AND POWER OF ATTORNEY FOR DIVISIONAL, CONTINUATION OR CIP APPLICATION for benefit of the prior U.S. or PCT application(s) under 35 U.S.C. §120.

POWER OF ATTORNEY

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (*List name and registration number*)

MANNY W. SCHECTER (Reg. No. 31,722); TERRY J. ILARDI, (Reg. No. 29,936); CHRISTOPHER A. HUGHES, (Reg. No. 26,914); EDWARD A. PENNINGTON, (Reg. No. 32,588); JOHN E. HOEL, (Reg. No. 26,279); JOSEPH C. REDMOND, JR., (Reg. No. 18,753); DOUGLAS W. CAMERON, (Reg. No. 31,596); LOUIS P. HERZBERG, (Reg. No. 41,500); KEVIN M. JORDAN, (Reg. No. 40,277); STEPHEN C. KAUFMAN, (Reg. No. 29,551); DANIEL P. MORRIS, (Reg. No. 32,053); LOUIS J. PERCELLO, (Reg. No. 33,206); JAY P. SBROLLINI, (Reg. No. 36,266); DAVID M. SHOFI, (Reg. No. 39,835); ROBERT M. TREPP, (Reg. No. 25,933); PAUL J. OTTERSTEDT, (Reg. No. 37,411); and WAYNE L. ELLENBOGEN (Reg. No. 43,602), each of them of IBM CORPORATION, P.O. Box 218, Yorktown Heights, New York 10598.

SEND CORRESPONDENCE TO:

PAUL J. FARRELL, ESQ.
DILWORTH & BARRESE
333 Earle Ovington Boulevard
Uniondale, New York 11553

DIRECT TELEPHONE CALLS TO:

(*Name and telephone number*)

(516) 228-8484

DECLARATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

SIGNATURE(S)

NOTE: Carefully indicate the family (or last) name as it should appear on the filing receipt and all other documents.

Full name of sole or first inventor Dirk Husemann

Inventor's signature



Date July 4, 2000

Country of Citizenship Germany

Residence Krebsbachweg 4, CH-8134 Adliswil, Switzerland

Post Office Address SAME AS ABOVE

Full name of **second joint inventor**, if any Michael Moser

Inventor's signature *Michael Moser*

Date July 4, 2000 Country of Citizenship Austria

Residence Frohburgstrasse 19, CH-8006 Zurich, Switzerland

Post Office Address SAME AS ABOVE

Full name of **third joint inventor**, if any _____

Inventor's signature _____

Date _____ Country of Citizenship _____

Residence _____

Post Office Address _____

Full name of **fourth joint inventor**, if any _____

Inventor's signature _____

Date _____ Country of Citizenship _____

Residence _____

Post Office Address _____

**CHECK PROPER BOX(ES) FOR ANY OF THE FOLLOWING
ADDED PAGE(S) WHICH FORM A PART OF THIS DECLARATION**

- ☐ Signature for subsequent joint inventors.
Number of pages added ____.
- ☐ Signature by administrator(trix), executor(trix) or legal representative for deceased or incapacitated inventor.
Number of pages added ____.
- ☐ Signature for inventor who refuses to sign or cannot be reached by person authorized under 37 C.F.R. §1.47.
Number of pages added ____.

- ☐ Added pages to combined declaration and power of attorney for divisional, continuation, or continuation-in-part (CIP) application.
Number of pages added ____.

- ☐ Authorization of attorney(s) to accept and follow instructions from representative.

If no further pages form a part of this Declaration then end this Declaration with this page and check the following item.

- ☒ This declaration ends with this page.